

mac.1 Halting States


tur:mac:hal:
sec

Although we have defined our machines to halt only when there is no instruction to carry out, common representations of Turing machines have a dedicated *halting state* h , such that $h \in Q$.


[explanation](#)

The idea behind a halting state is simple: when the machine has finished operation (it is ready to accept input, or has finished writing the output), it goes into a state h where it halts. Some machines have two halting states, one that accepts input and one that rejects input.

Example mac.1. *Halting States.* To elucidate this concept, let us begin with an alteration of the even machine. Instead of having the machine halt in state q_0 if the input is even, we can add an instruction to send the machine into a halting state.

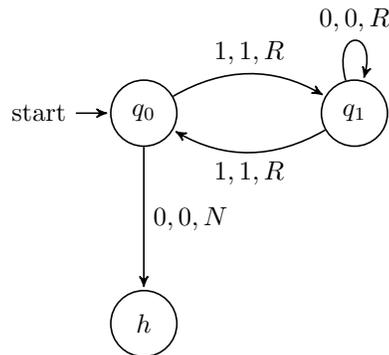

Let us further expand the example. When the machine determines that the input is odd, it never halts. We can alter the machine to include a *reject* state by replacing the looping instruction with an instruction to go to a reject state r .

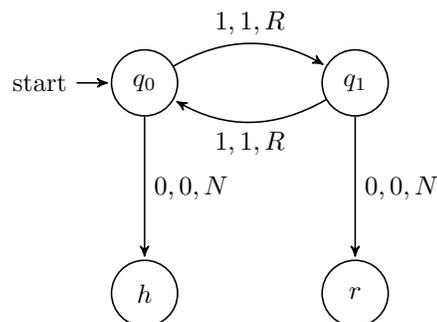

Adding a dedicated halting state can be advantageous in cases like this, where it makes explicit when the machine accepts/rejects certain inputs. However, it is important to note that no computing power is gained by adding a dedicated halting state. Similarly, a less formal notion of halting has its

[explanation](#)

own advantages. The definition of halting used so far in this chapter makes the proof of the *Halting Problem* intuitive and easy to demonstrate. For this reason, we continue with our original definition.

Photo Credits

Bibliography